





Typical Correction Factors for 11940A

Frequency (MHz)	Correction (dB)
30.000	54.00
50.000	49.50
75.000	46.50
100.000	43.00
125.000	42.00
150.000	41.00
175.000	40.00
200.000	39.00
250.000	37.50
300.000	35.00
350.000	33.00
400.000	32.50
450.000	33.30
500.000	33.00
550.000	33.30
600.000	32.00
650.000	30.00
675.000	29.00
700.000	28.50
725.000	29.00
750.000	30.20
800.000	32.00
850.000	32.00
900.000	31.50
950.000	29.00
1000.000	27.00

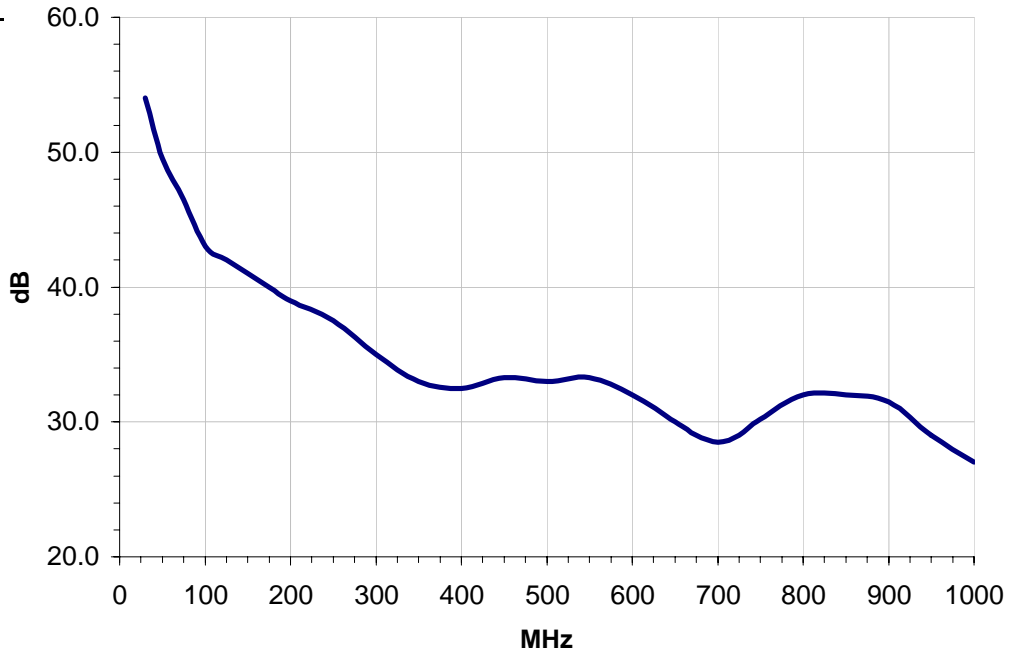

Typical Correction Factors for 11941A


Frequency (MHz)	Correction (dB)
0.009	90.00
0.030	78.00
0.060	72.00
0.100	68.00
0.300	58.00
0.600	52.00
1.000	48.00
3.000	43.00
6.000	41.00
10.000	39.00
20.000	39.00
30.000	37.00

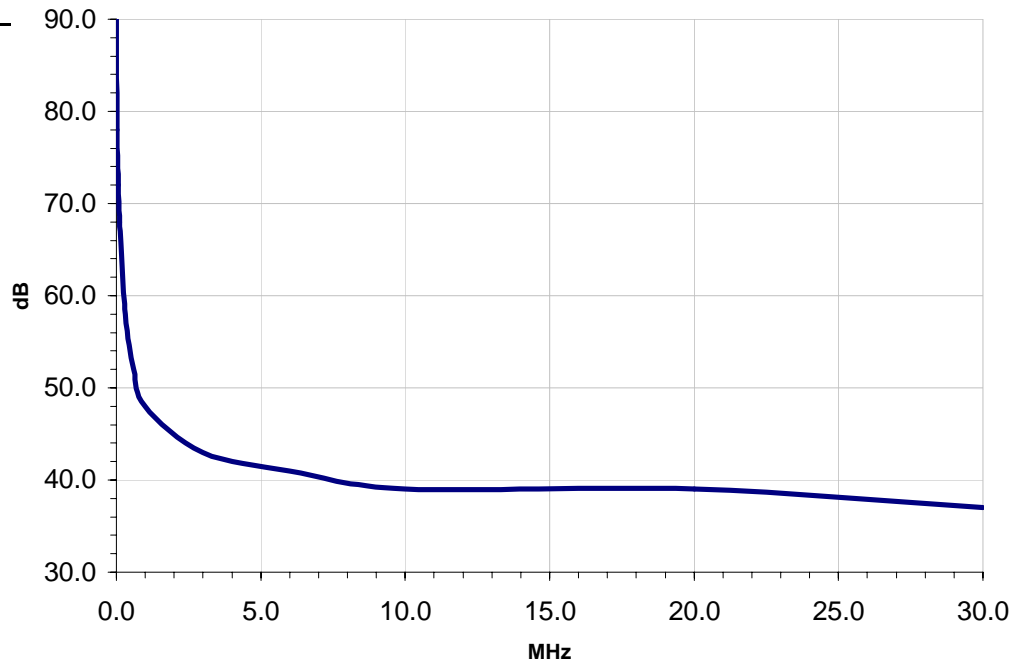




Typical Correction Factors for 11947A

Frequency (MHz)	Correction (dB)
0.009	10.00
0.010	9.90
0.030	9.80
0.100	9.80
1.000	9.80
10.000	9.90
30.000	9.90
100.000	10.20
150.000	10.40
200.000	10.80

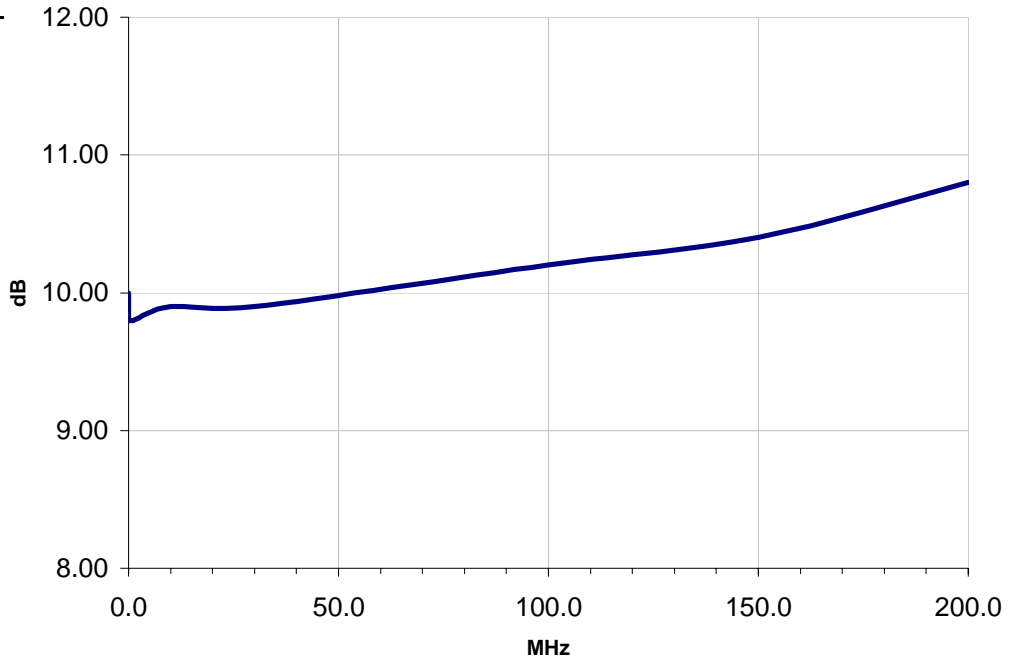

Typical Correction Factors for 11955A/11966C


Frequency (MHz)	Correction (dB)
30.000	13.70
40.000	11.40
50.000	10.00
60.000	9.50
70.000	9.20
80.000	9.20
90.000	9.50
100.000	10.10
110.000	10.80
120.000	11.50
130.000	11.90
140.000	12.30
150.000	12.50
160.000	12.70
170.000	13.00
180.000	13.50
190.000	14.20
200.000	14.90
210.000	15.40
220.000	15.70
230.000	16.00
240.000	16.40
250.000	16.90
260.000	17.70
270.000	18.40
280.000	19.00
290.000	19.60
300.000	20.40

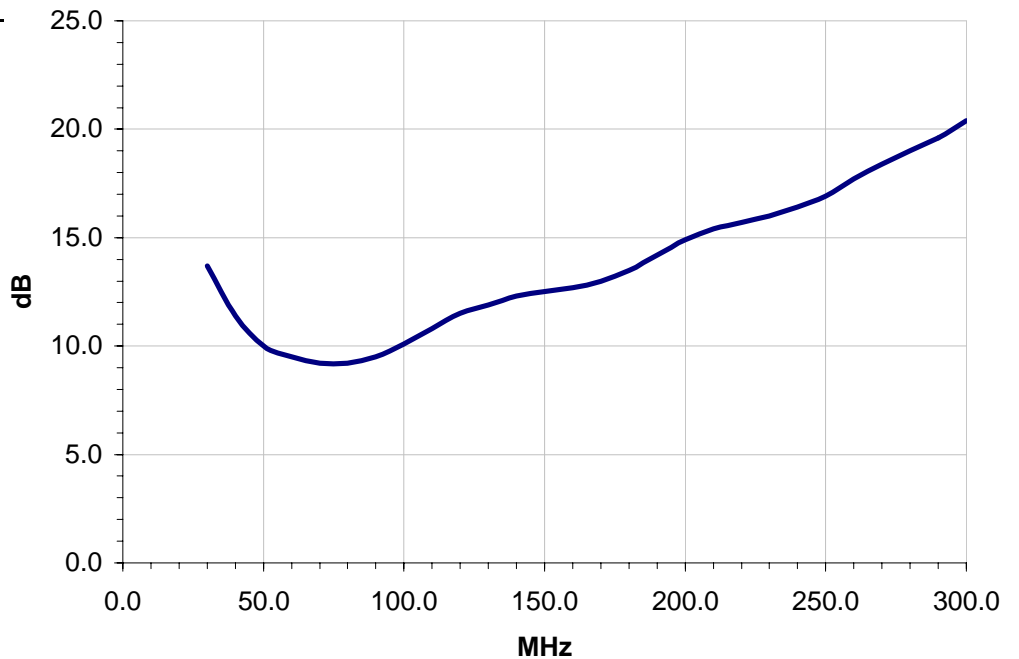




Typical Correction Factors for 11956A/11966D

Frequency (MHz)	Correction (dB)
200.000	10.80
225.000	11.60
250.000	12.30
275.000	13.30
300.000	14.90
325.000	15.10
350.000	15.30
375.000	15.70
400.000	16.20
425.000	16.70
450.000	17.40
475.000	18.30
500.000	18.50
525.000	18.80
550.000	19.30
575.000	19.40
600.000	20.00
625.000	20.80
650.000	21.40
675.000	21.90
700.000	22.30
725.000	22.10
750.000	21.90
775.000	22.40
800.000	23.20
825.000	23.70
850.000	24.00
875.000	24.80
900.000	25.50
925.000	25.70
950.000	25.60
975.000	25.20
1000.000	25.10
1050.000	25.50
1100.000	25.50
1150.000	26.40
1200.000	26.20
1250.000	26.50
1300.000	26.90
1350.000	27.90
1400.000	27.60
1450.000	27.20
1500.000	28.20
1550.000	29.20
1600.000	29.00
1650.000	28.50
1700.000	28.60
1750.000	30.10
1800.000	29.90
1850.000	29.60
1900.000	29.60
1950.000	29.90
2000.000	30.90

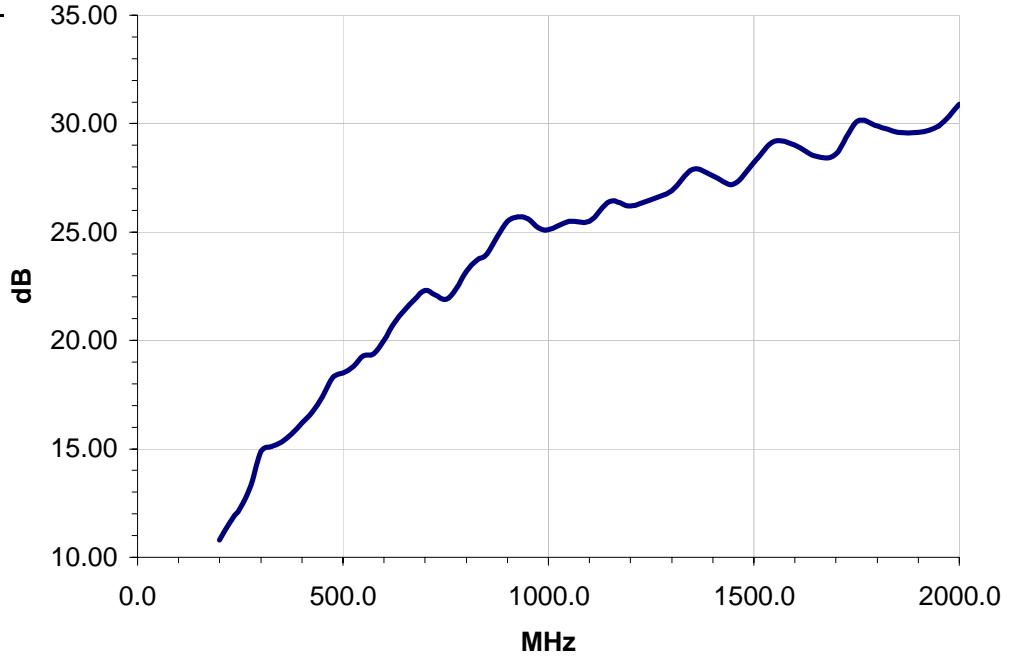




Typical Correction Factors for 11966E

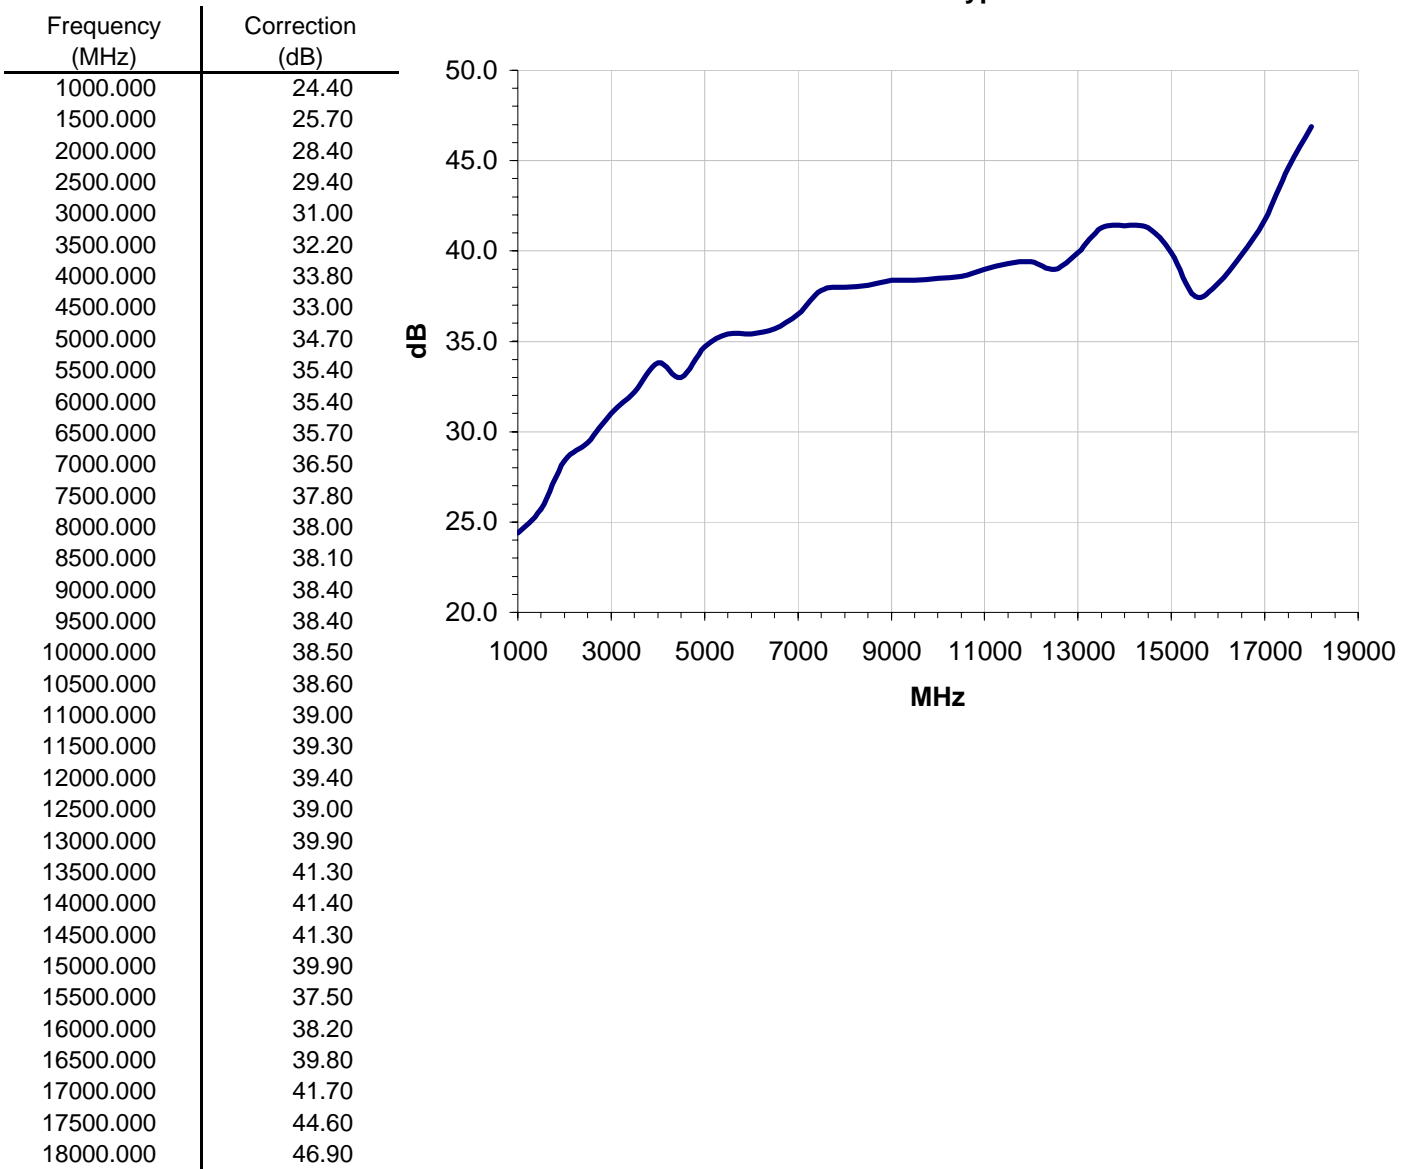




Typical Correction Factors for 11966J

Frequency (MHz)	Correction (dB)
18000.000	45.00
20000.000	45.50
25000.000	46.00
27000.000	47.00
31000.000	47.00
35000.000	50.00
38000.000	47.00
40000.000	47.00

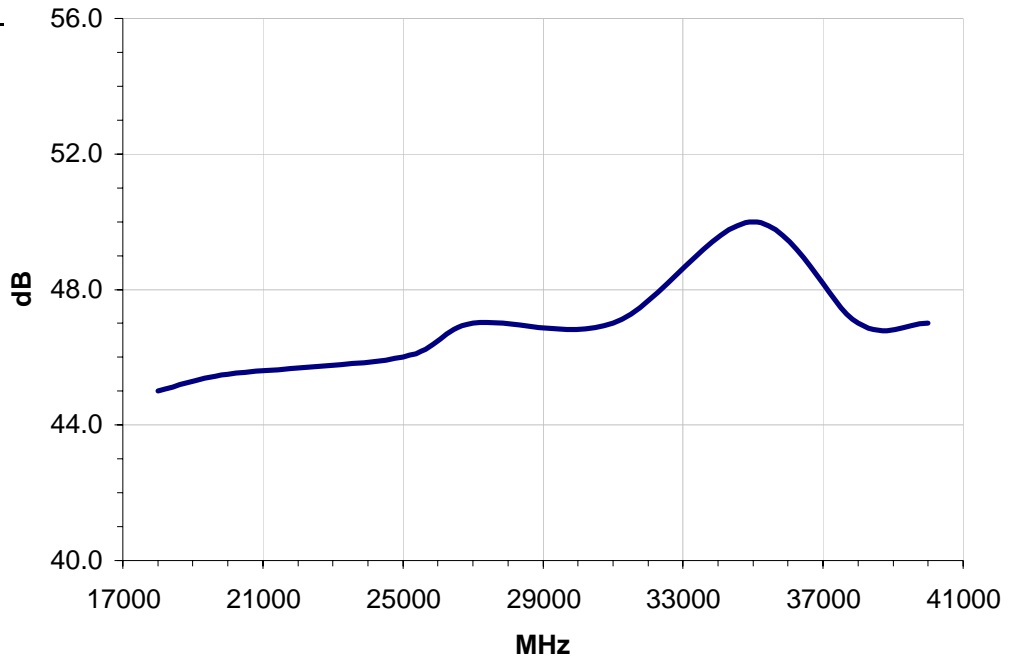


Typical Correction Factors for 11966L

Frequency (MHz)	Correction (dB)
30.000	0.30
500.000	1.60
1000.000	2.30

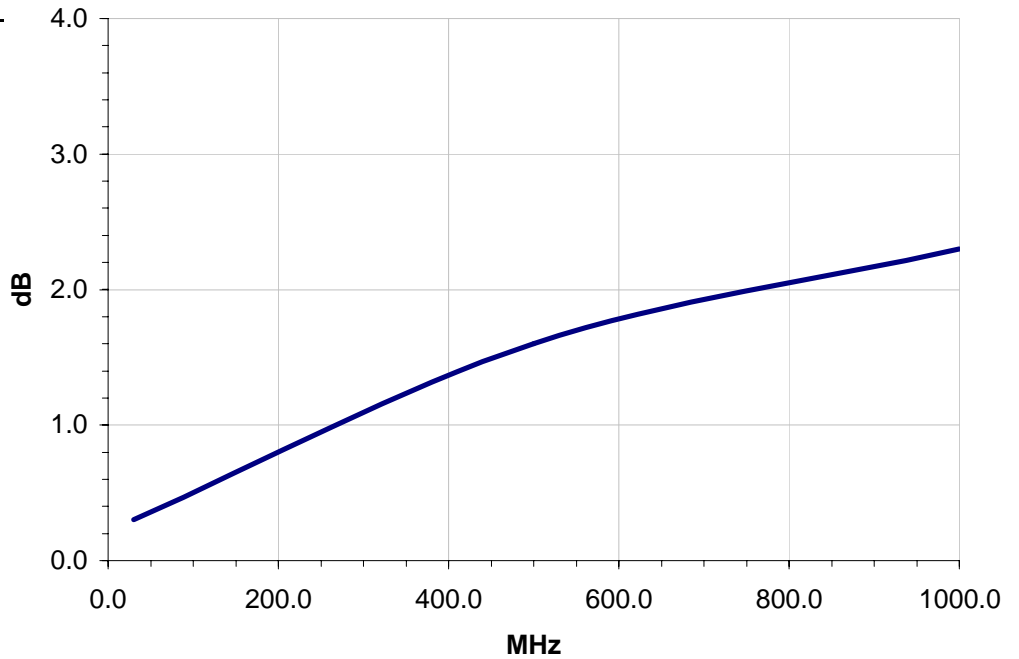



Typical Correction Factors for 11966P

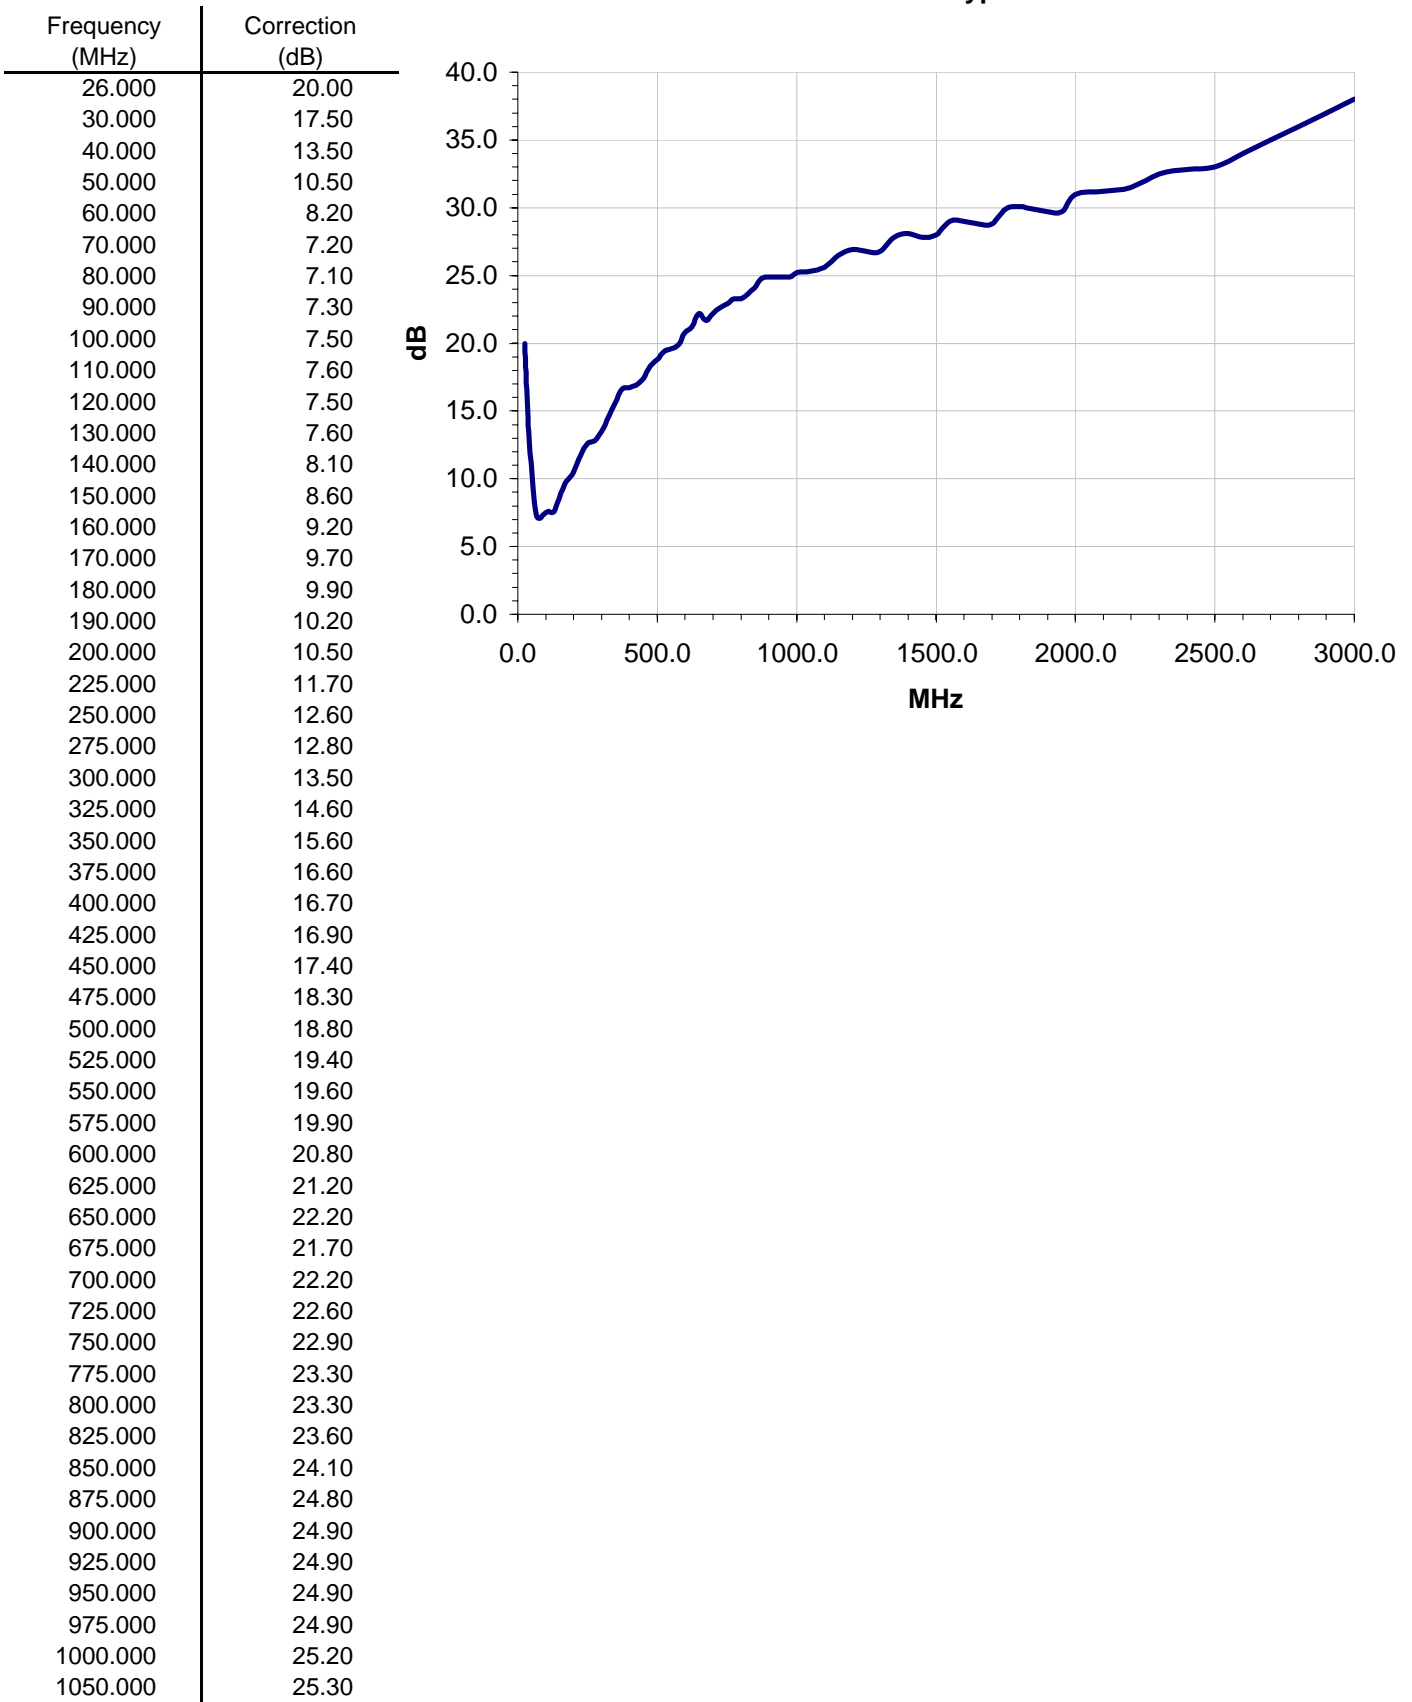




(continued) Typical Correction Factors for 11966P

1100.000	25.60
1150.000	26.50
1200.000	26.90
1250.000	26.80
1300.000	26.80
1350.000	27.80
1400.000	28.10
1450.000	27.80
1500.000	28.00
1550.000	29.00
1600.000	29.00
1650.000	28.80
1700.000	28.80
1750.000	29.90
1800.000	30.10
1850.000	29.90
1900.000	29.70
1950.000	29.70
2000.000	31.00
2100.000	31.20
2200.000	31.50
2300.000	32.50
2400.000	32.80
2500.000	33.00
2600.000	34.00
2700.000	35.00
2800.000	36.00
2900.000	37.00
3000.000	38.00

Typical Correction Factors for 11967D


Frequency (MHz)	Correction (dB)
0.009	7.70
0.010	6.80
0.020	3.40
0.040	1.80
0.060	1.40
0.080	1.30
0.100	1.20
0.200	1.10
0.400	1.00
1.000	1.00
2.000	1.10
4.000	1.20
6.000	1.20
8.000	1.30
10.000	1.40
20.000	1.70
30.000	2.40

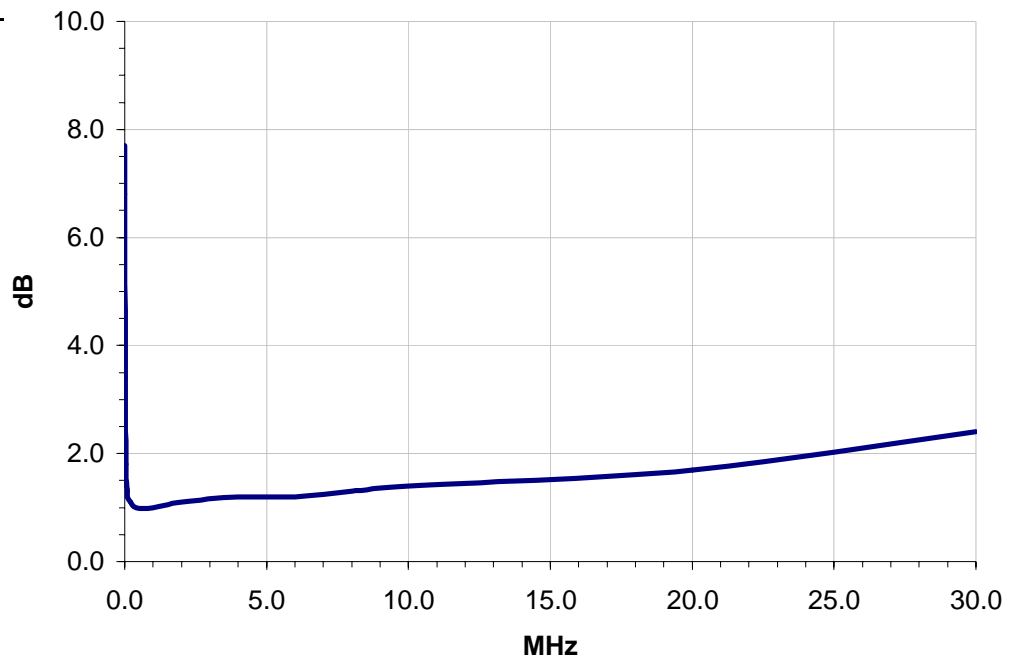




Typical Correction Factors for 11909A

Frequency (MHz)	Correction (dB)
0.009	30.40
0.010	30.60
0.015	31.40
0.030	31.90
0.050	32.10
50.000	32.00
100.000	32.00
200.000	31.90
300.000	31.90
400.000	31.90
500.000	32.00
600.000	32.20
700.000	32.20
800.000	32.00
850.000	31.80
900.000	31.60
950.000	31.20
1000.000	30.70

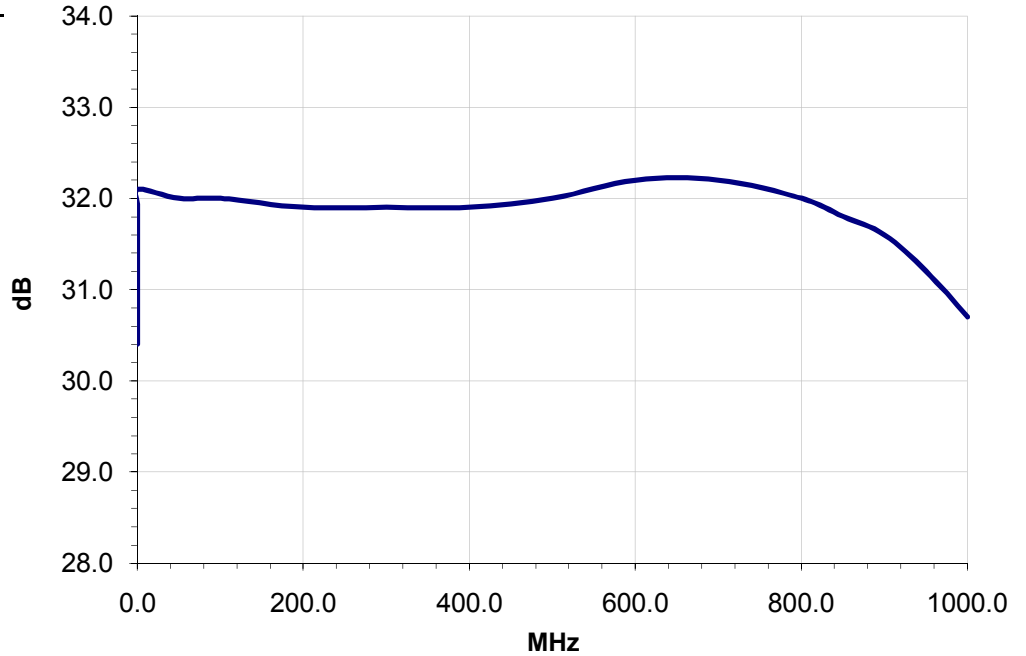


Typical Correction Factors for 85050A

Frequency (GHz)	Correction (dB)
2.0000	29.50
3.4000	28.70
5.4300	28.00
7.1400	27.10
8.8600	27.20
10.5700	26.90
14.0000	26.80
15.7100	26.20
17.4300	26.00
19.1400	26.30
22.5700	26.60
26.0000	27.10
27.7100	28.00
29.4300	28.70
31.1400	29.00
32.8600	29.90
34.5700	28.80
36.2900	28.20
39.7100	29.10
40.5700	30.00
41.4300	30.50
42.2900	30.00
43.1400	29.10
46.5700	26.60
50.0000	26.90

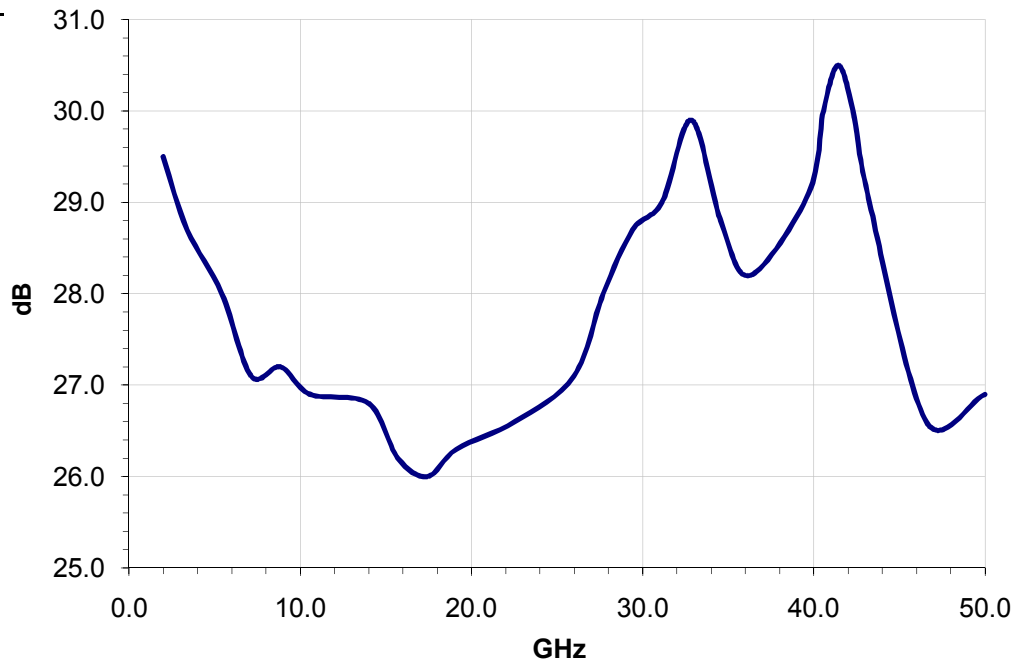




Typical Correction Factors for 83020A

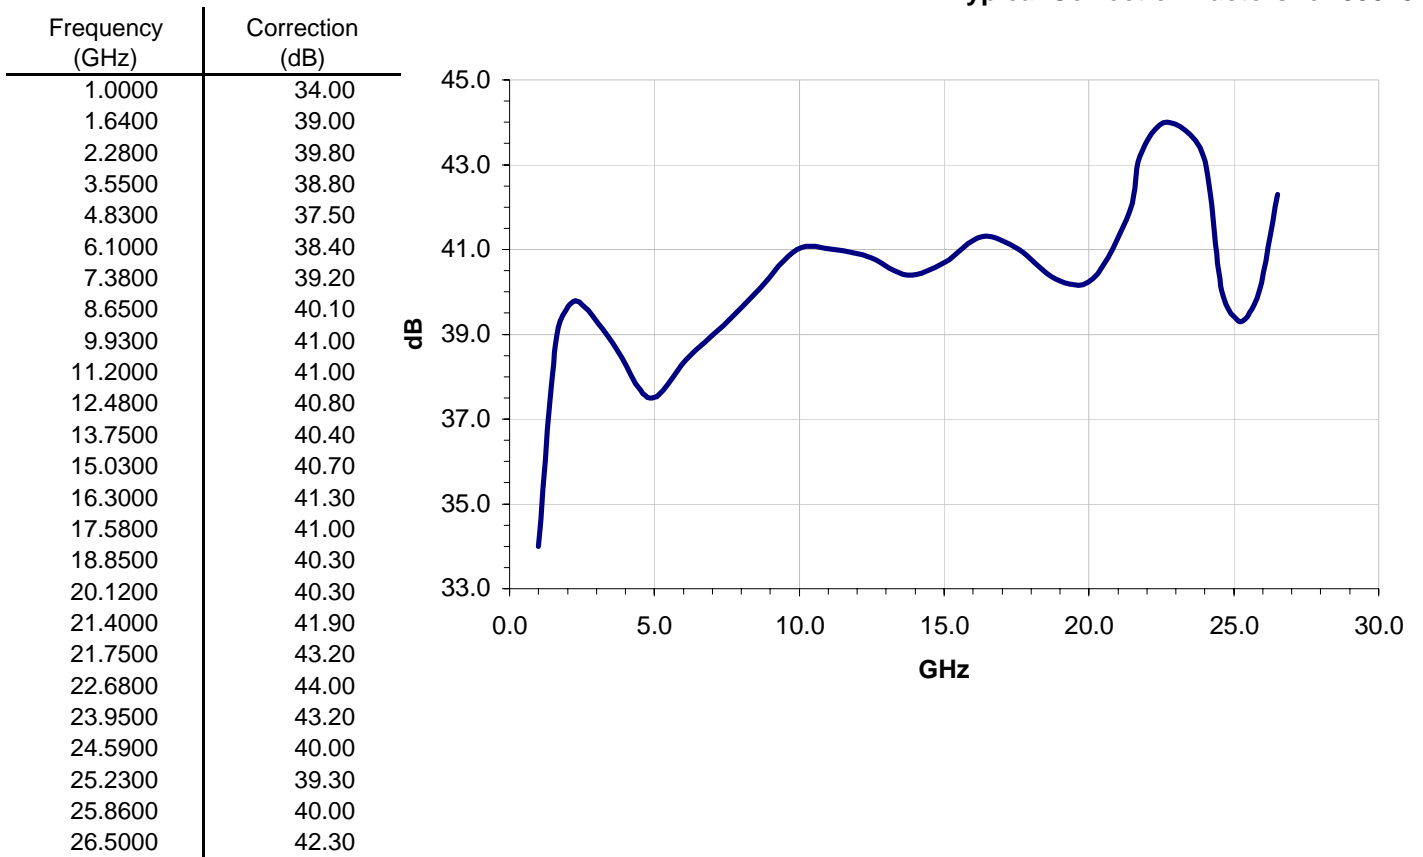


Typical Correction Factors for 83018A

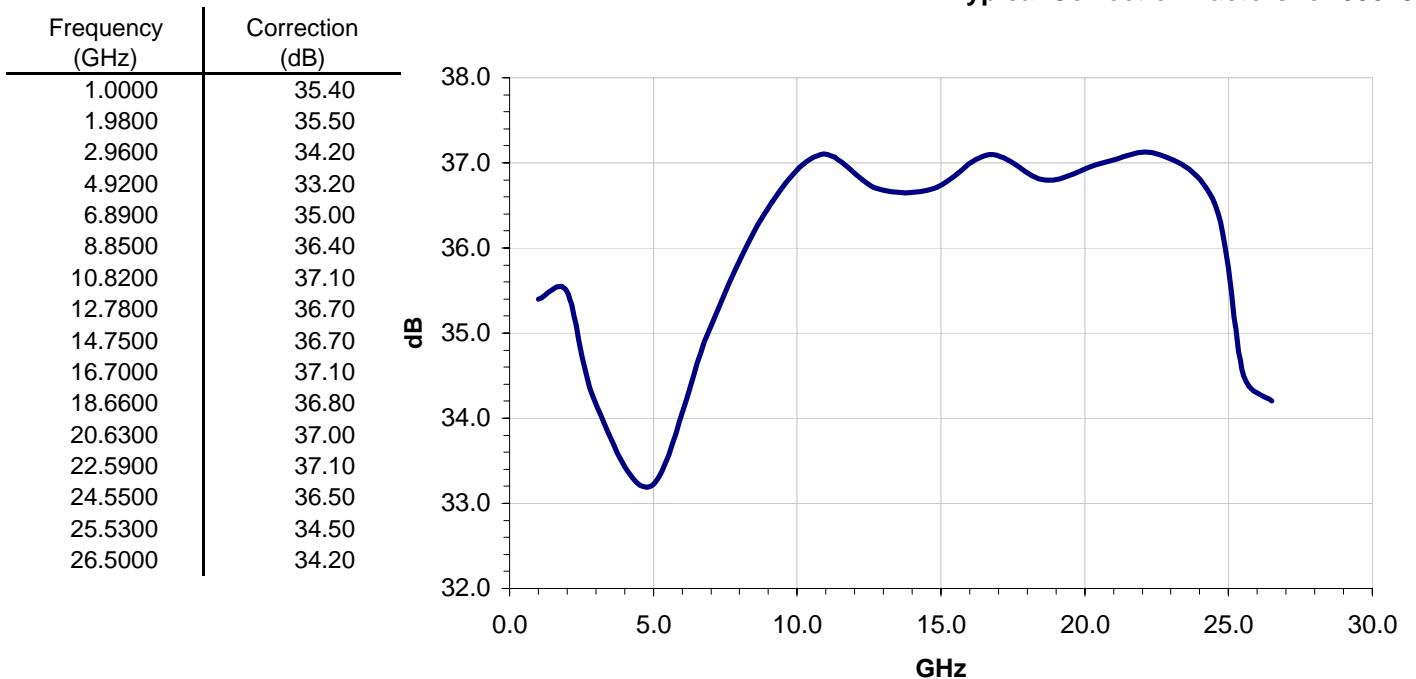




Typical Correction Factors for 83017A

Frequency (GHz)	Correction (dB)
0.5000	42.00
2.3500	36.50
3.9700	35.80
5.7000	35.70
7.4400	36.20
9.1800	35.70
10.9100	36.20
12.6500	36.20
14.3800	36.30
16.1200	36.50
17.8500	36.20
19.5800	36.50
21.3200	36.90
23.0600	36.60
24.7900	36.20
26.5000	35.00

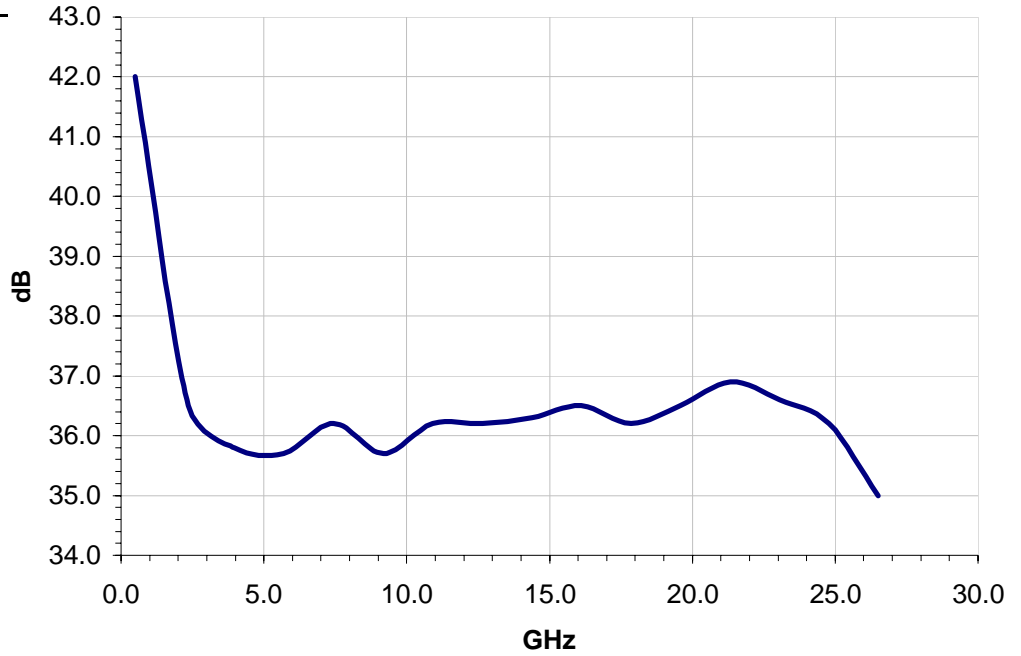

Typical Correction Factors for 87415A

Frequency (GHz)	Correction (dB)
2.0000	36.60
2.4000	37.30
2.8000	36.70
3.2000	35.80
3.6000	35.00
4.0000	35.00
4.4000	35.50
4.8000	35.70
5.2000	35.40
5.6000	35.40
6.0000	35.00
6.4000	34.90
6.8000	34.80
7.2000	35.20
7.6000	35.80
8.0000	35.40

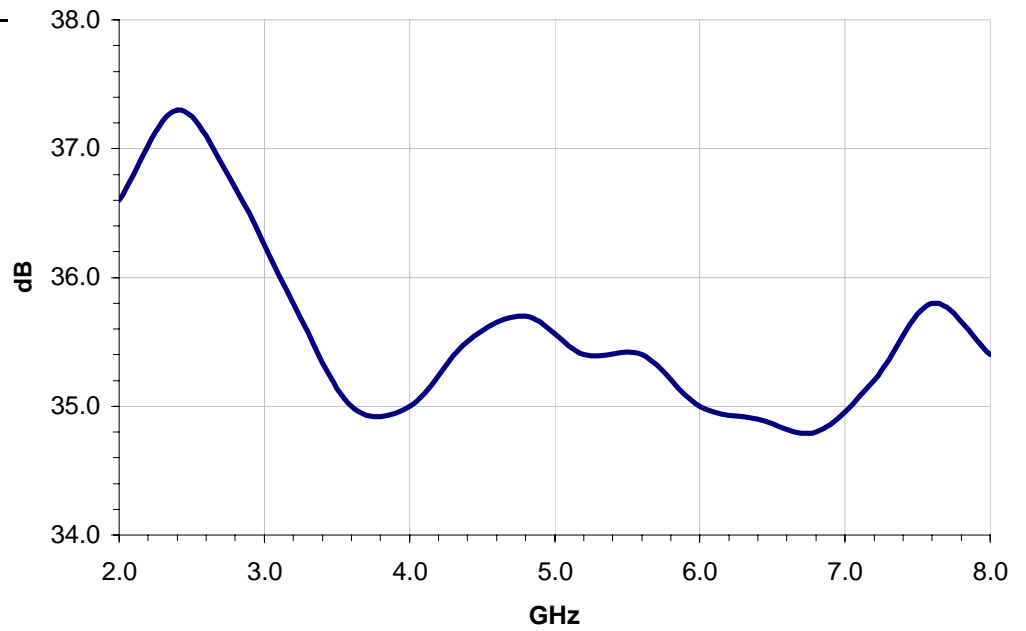



Typical Correction Factors for 87405A

